AE01 Heavy Duty Slides - Standard Type

Certified per ANSI BIFMA Test Standard

Specifications

- **Length:** 250mm to 1000mm (10" to 28")
- **Travel:** Refer to Slide Travel column below
- **Side Space:** 13.0mm (+0.5mm / -0.3mm)
- **Height:** 54mm (2.13")
- **Max. Loading:** 68 kg (150 lb)
- **Mount:** Side Mount
- **Disconnect:** Yes
- **Finish:** Clear Zinc or Black
- **Material:** Cold Rolled Steel

Package

- Unit Packed in 5 pairs/carton
- Bulk Packed in
  30 pcs/carton for external slides
  100pcs/carton for inner slides

Applications

- Wide Lateral File Drawers
- Large Storage Drawers
- Toolbox

Dimensional Specifications



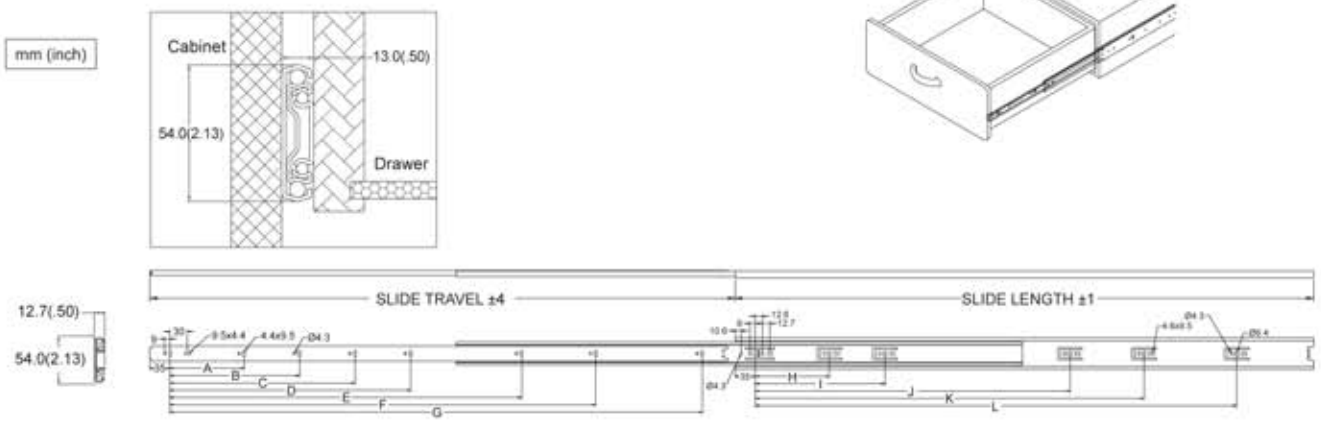

Note: Holes other than those shown are stamped for internal manufacturing purposes and may change without notice.

Item No.	Slide Length mm (inch)	Slide Travel mm (inch)	Loading Capacity kg (lb) / pair	Hole Positions mm (inch)											
				A	B	C	D	E	F	G	H	I	J	K	L
AE01-250	250 (9.84)	240 (9.45)	46 (100)	181 (7.12)	—	—	—	—	—	—	160 (6.29)	—	—	—	—
AE01-300	300 (11.81)	307 (12.08)	54.5 (120)	96 (3.77)	220 (8.66)	—	—	—	—	—	128 (5.03)	224 (8.81)	—	—	—
AE01-350	350 (13.78)	357 (14.05)	54.5 (120)	128 (5.03)	238 (9.37)	—	—	—	—	—	160 (6.29)	224 (8.81)	—	—	—
AE01-400	400 (15.75)	407 (16.02)	63.6 (140)	128 (5.03)	320 (12.59)	—	—	—	—	—	224 (8.81)	320 (12.59)	—	—	—
AE01-450	450 (17.72)	457 (17.99)	68.0 (150)	128 (5.03)	320 (12.59)	370 (14.56)	—	—	—	—	224 (8.81)	352 (13.85)	—	—	—
AE01-500	500 (19.69)	511 (20.11)	68.0 (150)	128 (5.03)	224 (8.81)	320 (12.59)	416 (16.37)	—	—	—	224 (8.81)	416 (16.37)	—	—	—
AE01-550	550 (21.65)	557 (21.92)	68.0 (150)	128 (5.03)	224 (8.81)	416 (16.37)	470 (18.50)	—	—	—	256 (10.07)	352 (13.85)	448 (17.63)	—	—
AE01-600	600 (23.62)	607 (23.89)	68.0 (150)	128(5.03)	224 (8.81)	416 (16.37)	520 (20.47)	—	—	—	128 (5.03)	352 (13.85)	480 (18.89)	—	—
AE01-650	650 (25.59)	657 (25.86)	68.0 (150)	128 (5.03)	224 (8.81)	416 (16.37)	576 (22.67)	—	—	—	128 (5.03)	352 (13.85)	544 (21.41)	—	—
AE01-700	700 (27.56)	707 (27.83)	68.0 (150)	128 (5.03)	224 (8.81)	416 (16.37)	544 (21.41)	620 (24.40)	—	—	128 (5.03)	352 (13.85)	544 (21.41)	—	—
AE01-750	750 (29.52)	757 (29.80)	68.0 (150)	128 (5.03)	224 (8.81)	320 (12.59)	544 (21.41)	670 (26.37)	—	—	128 (5.03)	352 (13.85)	544 (21.41)	672 (26.45)	—
AE01-800	800 (31.49)	812 (31.96)	68.0 (150)	128 (5.03)	224 (8.81)	320 (12.59)	544 (21.41)	720 (28.34)	—	—	128 (5.03)	224 (8.81)	384 (15.11)	544 (21.41)	672 (26.45)
AE01-850	850 (33.46)	862 (33.93)	68.0 (150)	128 (5.03)	224 (8.81)	320 (12.59)	544 (21.41)	672 (26.45)	768 (30.23)	—	128 (5.03)	224 (8.81)	448 (17.63)	576 (22.67)	704 (27.71)
AE01-900	900 (35.43)	912 (35.90)	68.0 (150)	128 (5.03)	224 (8.81)	320 (12.59)	416 (16.37)	544 (21.41)	736 (28.97)	820 (32.28)	128 (5.03)	224 (8.81)	448 (17.63)	576 (22.67)	736 (28.97)
AE01-950	950 (37.40)	962 (37.87)	68.0 (150)	128 (5.03)	224 (8.81)	320 (12.59)	416 (16.37)	608 (23.93)	736 (28.97)	870 (34.25)	128 (5.03)	224 (8.81)	512 (20.15)	672 (26.45)	800 (31.49)
AE01-1000	1000 (39.37)	1012 (39.84)	68.0 (150)	128 (5.03)	224 (8.81)	320 (12.59)	416 (16.37)	608 (23.93)	736 (28.97)	920 (36.22)	128 (5.03)	224 (8.81)	544 (21.41)	672 (26.45)	832 (32.75)

King Slide reserves the right to alter specifications of all the products without notice. If the entity is different from the illustration, please refer to the entity.